

**Dynamometer 04 TX / RX with readable radio remote control**



Includes plastic case, manual and calibration report.

**Anodized aluminum house.**

- Protection class IP 65.
- Overload indication at 10% overload.
- Test load 2 x WLL.
- Safety factor 5 x WLL.

**Electrical specifications**

- Rechargeable batteries including charger.
- Charger: Input 230 VAC, output 20 VDC.
- Battery operating time about 100 hours.

**Electronic specifications**

- LCD display with 5 positions, digit height 17 mm.
- Operating temperature between -10 °C and + 55 °C
- Accuracy up to approx. 0.15% of the reading value.

**RX-PORT electrical specifications**

- Alkaline batteries (3 x AA type).
- Stand time approx. 150 hours.
- Battery indicator.

**RX-PORT electronic specifications**

- LCD display with 5 positions, 12 mm digit height.
- 433.92 MHz frequency control.
- Operating temperature between -5 °C to + 55 °C.
- RS232 port for printer or PC connection (not all types of printers).

**TX-LOAD electrical specifications**

- Transmission range max 50 m.

**TX-LOAD electronic specifications**


- 433.92 MHz frequency control.

**Option**

- Bow shackle from 10T.

**Norm:**

- EN12100-1/2, EMC2004/108/EG, EN13155, EN13889

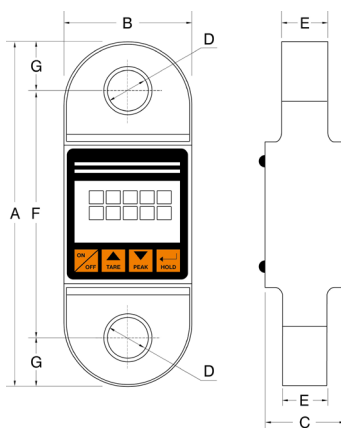

| Type          | WLL (kg) | Resolutie (kg) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | Bow shackle (t) | Weight (kg) | ProductId |
|---------------|----------|----------------|--------|--------|--------|--------|--------|--------|--------|-----------------|-------------|-----------|
| DSD04-05TX/RX | 5000     | 2              | 230    | 85     | 54     | 27     | 32     | 168    | 32.5   | 6.5 in.         | 1.85        | 1512003   |
| DSD04-10TX/RX | 10000    | 5              | 315    | 100    | 59     | 38     | 49     | 200    | 57.5   | 12 ex.          | 3.60        | 1512005   |
| DSD04-25TX/RX | 25000    | 10             | 350    | 126    | 70     | 53     | 70     | 210    | 70     | 25.00 ex.       | 5.50        | 1512009   |
| DSD04-50TX/RX | 50000    | 20             | 430    | 128    | 100    | 72     | 100    | 260    | 90     | 55.00 ex.       | 13.5        | 1512011   |