


CUER plate lifting clamps for hoisting stainless steel plates

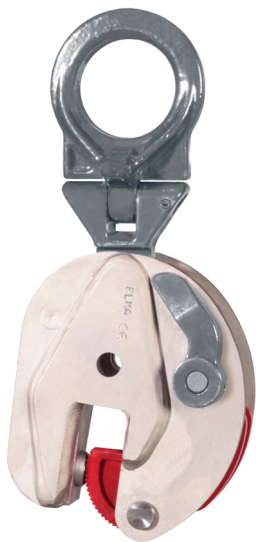




For safe lifting and transporting in vertical position of stainless steel plates.
Minimum weight to be lifted is 10% of the safe workload.

Properties

- Segment, segment axis and pivots are made of stainless steel.
- The housing and the latch pin are nickel plated to prevent the contact between carbon steel and stainless steel plates.
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.

Norm:

- EN12100-1/2, EN13155, AS4991, ASME-B30,20

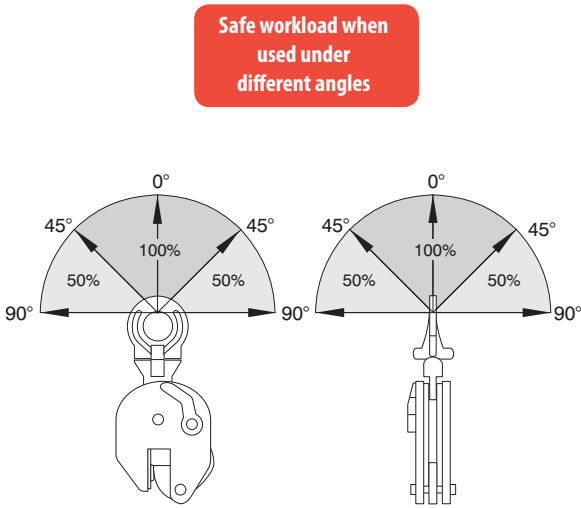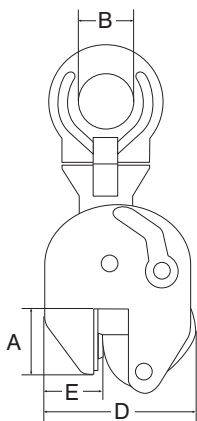

Type	WLL (kg)	Jaw opening (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)	ProductId
CUER-1.0	1000	0-25	56	50	292	141	37	47	15	3.8	3363301
CUER-2.0	2000	0-35	78	70	372	183	56	56	16	8	3363302

