

TEO Mechanical crane scale



**TEO-200 /
TEO-5000**

The REMA TEO mechanical crane scale with one suspension eye and hook with safety latch up to 5,000 kg and from 12,500 kg up to 85,000 kg with 2 eyes.

Properties

- Robust construction
- Maintenance-free hydrostatic principle
- Easy zero and tare adjustment
- Designed for continuous use
- Accuracy within +/- 1% of full scale
- Light weight – low height
- Strong acrylic glass covers the dial plate
- Large dial plate diameter 160 mm
- Temperature range -20 / +50 C (-4 / +122 F).

Options



- Remote reading.
- Bow shackle.

Norm:

- EN12100-1/2, EN13155



**TEO-12.500/
TEO-85.000**

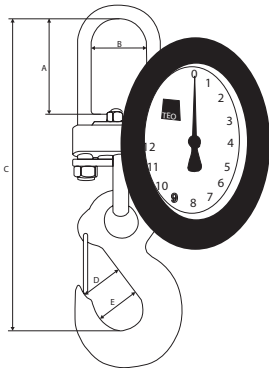

| Type | WLL (kg) | Resolutie (kg) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | Weight (kg) | ProductId |
|------------|----------|----------------|--------|--------|--------|--------|--------|-------------|-----------|
| TEO-200 | 200 | 1 | 60 | 53 | 230 | 27 | 35 | 5 | 1550001 |
| TEO-320 | 320 | 2 | 60 | 53 | 230 | 27 | 35 | 5 | 1550003 |
| TEO-500 | 500 | 2 | 60 | 53 | 230 | 27 | 35 | 5 | 1550005 |
| TEO-750 | 750 | 5 | 60 | 53 | 230 | 27 | 35 | 5 | 1550007 |
| TEO-1250 | 1.250 | 5 | 60 | 53 | 230 | 27 | 35 | 5 | 1550009 |
| TEO-2000 | 2.000 | 10 | 60 | 53 | 230 | 27 | 35 | 5 | 1550011 |
| TEO-3200 | 3.200 | 20 | 75 | 53 | 280 | 34 | 46 | 5.5 | 1550013 |
| TEO-5000 | 5.000 | 20 | 75 | 53 | 300 | 42 | 56 | 6.5 | 1550015 |
| TEO-12.500 | 12.500 | 50 | 40 | 41 | 213 | - | - | 8.1 | 1550017 |
| TEO-25.000 | 25.000 | 100 | 55 | 42 | 267 | - | - | 12.9 | 1550019 |
| TEO-50.000 | 50.000 | 200 | 75 | 56 | 329 | - | - | 25 | 1550021 |
| TEO-85.000 | 85.000 | 500 | 85 | 60 | 390 | - | - | 60 | 1550023 |