

CSEU vertical lifting clamp





For hoisting and transporting plates and constructions from any position.  
**Minimum weight to be lifted is 10% of the safe workload.**

Properties

- When 1 Clamp with a varying jaw opening is required.
- Adaptable in steps of 30 mm.
- Strong and lightweight construction.

Norm:

- EN12100-1/2, EN13155, AS4991, ASME-B30,20

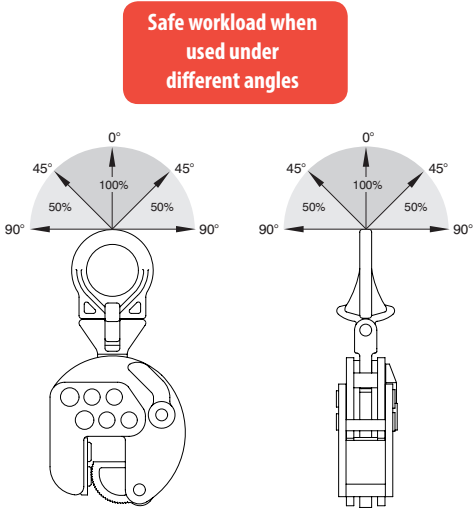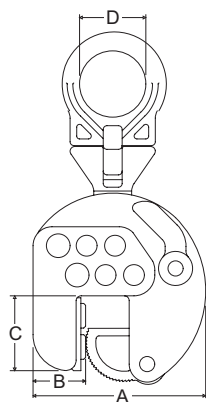

Type	WLL (kg)	Jaw opening (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)	ProductId
CSEU-3	3000	0-95	182-245	55	80	70	16	370	73	11	3313020

19

LIFTING CLAMPS VERTICAL PLATE CLAMP



CBT vertical lifting clamp with movable pivot.



For vertical lifting and transporting (thin) sheet metal. Special movable pivot in the clamp provide extra pressure on the material, eliminating the risk of slippage.  
No minimum weight required.

Norm:

- EN12100-1/2, EN13155, AS4991, ASME-B30,20

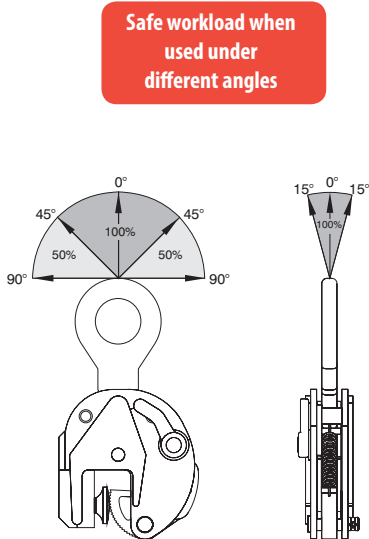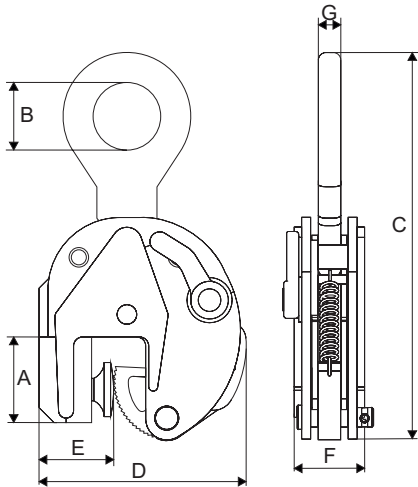

Type	WLL (kg)	Jaw opening (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)	ProductId
CBT-0.25	250	0-13	53	30	200	110	50	38	10.5	1.85	3364000
CBT-1	1000	0-20	57	45	258	138	50	47	15	4	3364001