

Dynamometer 04



Includes plastic case, manual and calibration report.

Mechanical properties

- Anodized aluminum house.
- Protection class IP 65.
- Overload indication at 10% overload.
- Test load 2 x WLL.
- Safety factor 5 x WLL.

Electrical specifications

- Alkaline battery (9V type).
- Battery operating time about 100 hours.

Electronic specifications

- LCD display with 5 positions, digit height 17 mm.
- Operating temperature range between -10° C to + 55° C.
- Accuracy up to approx 0.15% of the reading value.

Functions


- Automatic resetting when switched on.
- Easy-to-use menu: ON/OFF, tare, peak value and hold buttons.
- Self-calibrating at zero and weight values.
- Readout possibilities: gross, net and tare weight.
- In peak value function, maximum weight is held.
- In hold function, current weight is held.
- Measuring unit selection (kg - t - ton - lbs - daN - kN).
- Automatic power supply OFF.

Option

- Bow shackle from 10T.

Norm:

- EN12100-1/2, EMC2004/108/EG, EN13155, EN13889

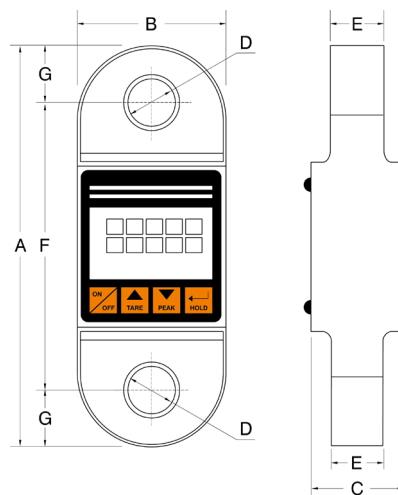

Type	WLL (kg)	Resolutie (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Bow shackle (t)	Weight (kg)	ProductId
DSD04-1.25	1250	0.5	192	85	54	15	16	142	25	1,50 in.	1.15	1508000
DSD04-2.5	2500	1	218	85	54	21	25	160	28	3,25 in.	1.35	1508001
DSD04-5.0	5000	2	230	85	54	27	32	165	32.5	6.50 in.	1.85	1508003
DSD04-10.0	10000	5	315	100	59	38	49	200	57.5	12.00 ex.	3.60	1508005
DSD04-20.0	20000	10	350	126	70	53	70	210	70	25.00 ex.	5.50	1508007