

**CU-H universal plate lifting clamps for steel plates up to a hardness of 50RC (485HB)**



Lifting clamps for safely transporting steel plates in vertical position.  
**Minimum weight to be lifted is 10% of the safe workload.**

**Properties**


- Equipped with universal lifting eye, movable in two directions.
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.
- WLL and size of the jaw opening are clearly indicated on the clamp.
- Safety factor of at least 5 x WLL.
- Each clamp is 2x WLL testloaded.

**Application**

- For lifting steel plates up to a hardness of 50 RC (485 HB).
- Suitable for lifting, 180 ° turning and vertical transport of steel plates.

**Norm:**

- EN12100-1/2, EN13155, AS4991, ASME-B30,20

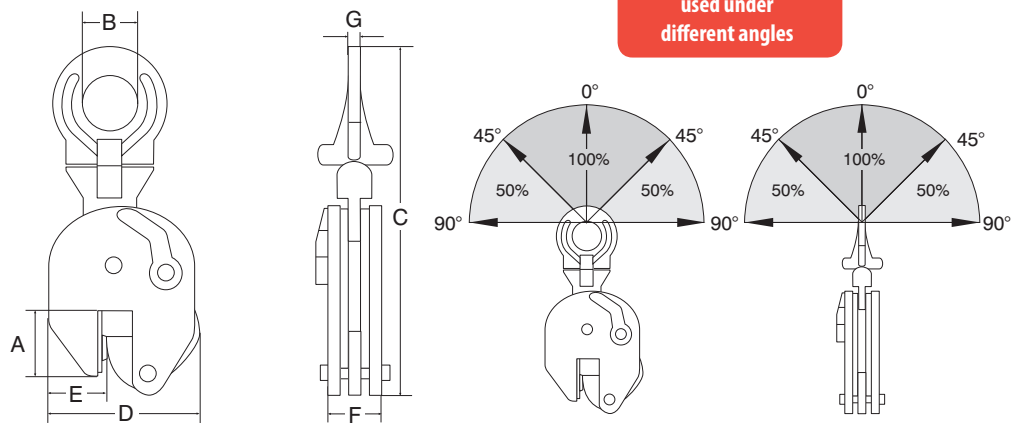

Type	WLL (kg)	Jaw opening (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)	ProductId
CU-0.75H	750	0-13	47	30	203	100	35	37	10	1.7	3363101
CU-1.0H	1000	0-25	55	50	295	142	38	47	14	3.9	3363103
CU-2.0H	2000	0-35	80	70	370	185	55	56	16	7.3	3363105
CU-3.0H	3000	0-35	80	70	370	185	55	56	16	8	3363107
CU-4.5H	4500	0-45	85	70	430	230	60	78	20	17	3363109
CUE-6.0H	6000	0-50	114	78	527	259	82	78	32	24	3363112

