

SELECT 30S adjustable trolley




The Rema Select 30 S spindle push trolley is suitable for various steel profiles. They are simple, quick and safe to install, ideal for assembly work.

Properties

- Suitable for flat or bevel profiles.
- Equipped with solid steel wheels with maintenance-free bearings.
- Compact and light weight.
- Quick assembly through threaded adjusting bar.
- Safe by extra locking lever.
- With wheel rupture supports.
- Robust steel version with a low own weight.

Norm:

- EN12100-1/2, EN13157

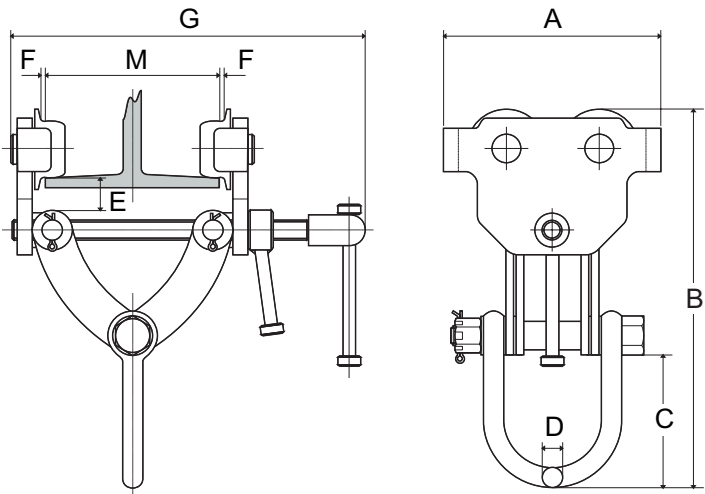

Type	WLL (kg)	Flange width (mm)	Min. radius (mm)	A (mm)	Bmin (mm)	Bmax (mm)	C (mm)	D (mm)	E (mm)	G (mm)	Weight (kg)	ProductId
S30S 005	500	64 - 203	1100	174	263	324	105	16	25.4	340	6	0918001
S30S 010	1000	63 - 203	1100	174	263	324	105	16	25.4	340	7	0918003
S30S 020	2000	76 - 203	1300	280	339	387	111	22	25.4	340	20	0918005
S30S 030	3000	76 - 203	1400	345	374	438	127	27	26	345	32	0918007
S30S 050	5000	100 - 305	1500	395	450	528	135	35	81	465	53	0918009