

CNMA vertical non-marking lifting clamp



The CNMA clamp is equipped with 2 clamping jaws that are provided with special synthetic plastic. After hoisting, the clamp leaves no damage. The clamp is locked in the closed and open position.

Properties

- Only available in 500 KG version.
- Equipped with synthetic plastic jaws.
- Jaw opening adjustable in steps of 20 mm from 3 to 180 mm.


Application

- For hoisting and transporting of stainless steel, aluminum, wood and natural stone where the work-piece can not be damaged.

Norm:

- EN12100-1/2, EN13155, AS4991, ASME-B30,20

Safe workload when used under different angles

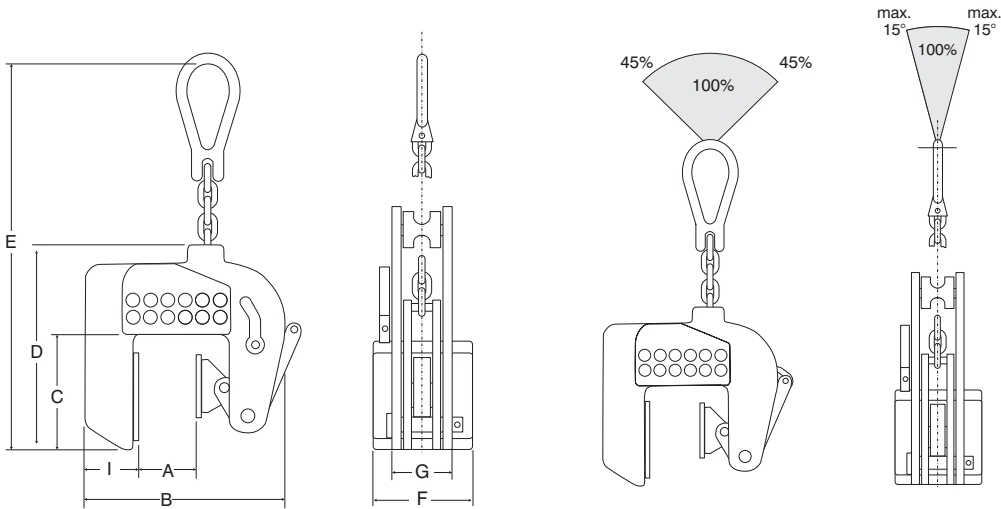

Type	WLL (kg)	Jaw opening (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	I (mm)	Weight (kg)	ProductId
CNMA-05	500	1-180	0-180	220-340	143	223	360	80	66	61	10	3315006