


Electric-/pneumatic vacuum lifters

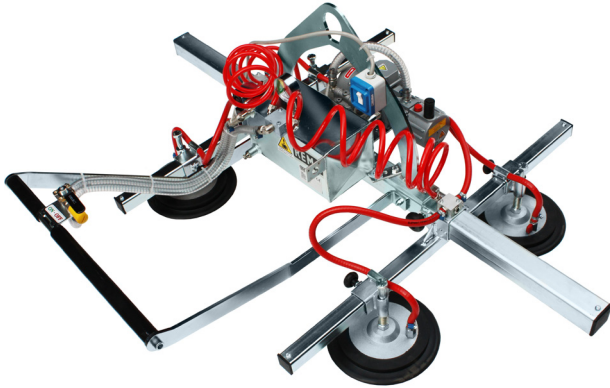

For horizontal transport of non-porous, stable and flat sheets of metal, plastic and other materials.

Properties

- Elephant GLA types are driven by an electric vacuum pump.
- Elephant VLA types are driven by air

Safety:

- Vacuum protection against release.
- Acoustic signal at negative pressure.
- Safety bar for sufficient distance.
- Pressure gauge, vacuum control.
- Acoustic signal included.
- Rechargeable batteries and charger.
- Minimum air pressure for type VLA must be 6-7 Bar.

Benefits:

- Ergonomic action by 1 person.
- Low maintenance.

Option

- GLA types are also feasible with battery vacuum pump.
- Battery, including charger.
- Manual mechanical rotation and tilting.
- Vacuum lifters for wood and stone on request.
- Higher capacities on request.



IMPORTANT!

- Always check the material specifications and dimensions (L x W x D) of the sheet or workpiece to be lifted.
- Larger tonnages and / or other specifications on request.

Norm:

- EN12100-1/2, EN13155

Type	WLL (kg)	Number of pistons	Piston dimensions (mm)	L x B (mm)	Construction height (mm)	Weight (kg)	ProductId
GLA4F-0.25	250	4	250	1750 x 1150	620	55	3660001
GLA4F-0.5	500	4	300	1750 x 1150	620	55	3660003
GLA6F-0.5	500	6	250	2200 x 1200	620	90	3660005
GLA6F-1.0	1000	6	300	2200 x 1200	620	90	3660007
GLA8F-1.0	1000	8	250	2750 x 1150	620	150	3660009
GLA8F-1.5	1500	8	300	2750 x 1150	620	150	3660011
GLA10F-2.0	2000	10	300	2750 x 1150	620	200	3660012
VLA4F-0.25	250	4	250	1750 x 1150	620	55	3660013
VLA4F-0.5	500	4	300	1750 x 1150	620	55	3660015
VLA6F-0.5	500	6	250	2200 x 1200	620	90	3660017
VLA6F-1.0	1000	6	300	2200 x 1200	620	90	3660019
VLA8F-1.0	1000	8	250	2750 x 1150	620	150	3660021
VLA8F-1.5	1500	8	300	2750 x 1150	620	150	3660023